


Features

- ▶ Ideally designed for operation of 1" ball valve
- ▶ High efficiency and durability
- ▶ Free voltage (87~270 VAC, 1 phase) and optional 24V AC/DC
- ▶ Compact and light



PG11 cable gland with wires

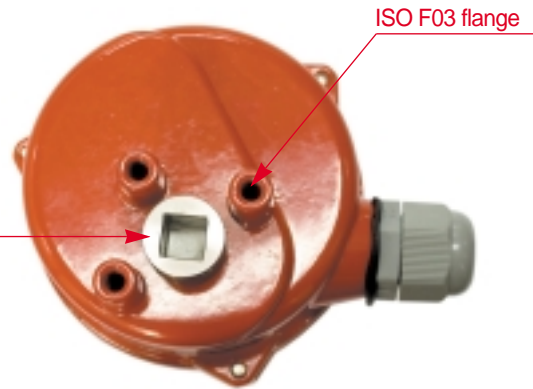

ISO F03 flange

11 x 11mm square female shaft

Specifications

Model		PGI 0020	
Rate Torque (Nm)		25	
Main Power		Free voltage (110 / 220VAC / 1Ph / 50 / 60Hz) 24V AC / DC	
Operating Time	50 Hz	11	
	60 Hz		
Rated Current	24V	AC	0.60
		DC	0.55
	1Phase	110	0.16
		220	0.08
Motor Insulation Class		E	
Enclosure		IP66, O-ring sealed	
Duty Cycle (on-off)		S2 : 50%	
Motor		DC motor	
Limit Switches		1 ea for Open & Close (5A, 250VAC)	
Extra Limit Switches		Relays for Open & Close (5A, 250VAC)	
Mounting		ISO F03, 9 X 9 - DP12 square female shaft	
Travel Angle		90° ± 5°	
Electrical Connection		1-PG11 cable gland with wires 30cm long	
Surface Protection		Polyester coating	
Operating Temperature		-10°C - +65°C	
Humidity (R.H)		90%	
Weight		1 kg	

Wiring

